



[→ Product Website](#)

The S1934 with a resolution of 1280 x 1024 pixels and a maximum brightness of 250 cd/m<sup>2</sup> is particularly well suited for universal use in a professional context. The display backlight with efficient but bright white LEDs is a particularly impressive feature. The S1934 consumes just 9 watts in regular use. With its DisplayPort, DVI-D, D-Sub interfaces, the S1934 is equally adept at processing analogue and digital signals. Speakers and headphone jack are integrated into the housing. The monitor uses an automatic brightness control to set itself to match the ambient light.


- ✓ Contrast 1000:1, brightness 250 cd/sq m
- ✓ Energy-saving LED backlight, mercury-free
- ✓ Auto-EcoView and EcoView Index for maximum energy-saving and optimal ergonomics.
- ✓ Built-in speaker and headphone connection
- ✓ DisplayPort, DVI-D and D-sub inputs for digital and analogue connection
- ✓ 5-year warranty for highest investment security

## Image quality

### Precise, high-contrast, bright and crisp screen


#### Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 1280 x 1024 pixels, maximum contrast of 1000:1, and stable brightness of up to 250 cd/m<sup>2</sup>. That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.

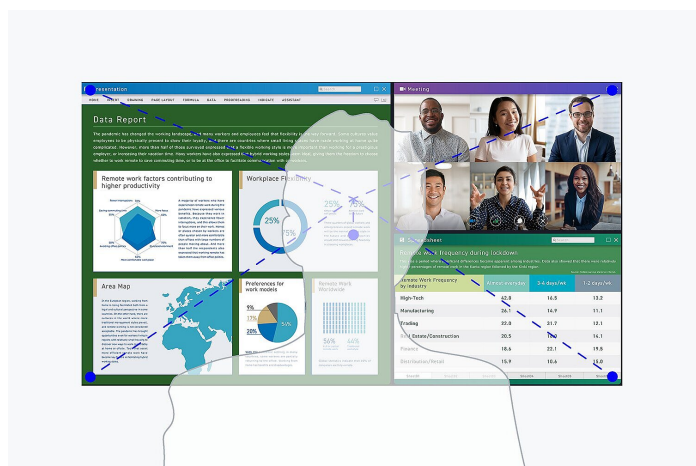


#### Precise color control

An image can only be perfect if the colors are, too. This is why EIZO monitors have a 10-bit look-up table at a minimum, which allows the color information to be assigned much more precisely than with conventional 8-bit LUTs. The finest color gradations ensure that gradients are always perfectly displayed, while also offering customized adjustment options. For example, you can adjust the white balance from 4000 K to 10 000 K in 500-K intervals.



Look-Up-Table with 10 and more bit



Look-Up-Table with 8 bit

## Ergonomics

### Working in a relaxed manner


#### Easy on the eyes with Auto EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto EcoView function continuously measures changes of the ambient light and optimises the monitor with ideal brightness values automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another plus: the automatic brightness adjustment can significantly reduce power consumption.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how economical your settings are.



During the day



In the evening


#### FOR THE SAKE OF THE EYES

#### Flicker free

The monitor is flicker-free at every brightness setting. This is great for users, as their eyes will not tire as quickly, allowing them to work in front of the screen for longer periods of time without fatigue.


## Anti-glare coating: more image, less reflection

The S1934 offers a perfect, non-glare surface. By minimizing glare by diffusing the reflected light, the S1934 effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the monitor, without having to sit in a forced position to prevent glare.

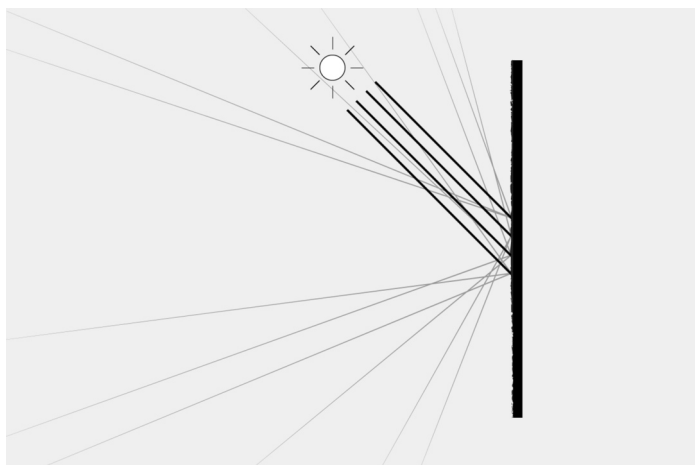


## Ergonomic stand


Ergonomic and stable: the adjustable stand focuses on ergonomics. You can rotate, swivel and tilt the monitor stand until you find the most comfortable setting for your back, neck and sitting posture. It features continuous height adjustment and can be lowered almost to the base plate of the stand, enabling you to position the top image line ergonomically right below your eye level.




**Height**  
100 mm



**Tilt**  
Between 0° forwards and 30° backwards



**Swivel**  
35°




**Rotation**  
clockwise

## Software and ease of use Features for greater comfort

### Preset color modes: optimized display at the touch of a button

Preset color modes optimize the viewing of images, texts or videos. Because it makes a difference whether you are watching a video, looking at a picture, surfing the net or writing texts. At the touch of a button, you can set the respective preset for brightness, gamma correction and color temperature. An example: Paper mode simulates the pleasant contrast of printed paper, making reading easier on the eyes and preventing fatigue.

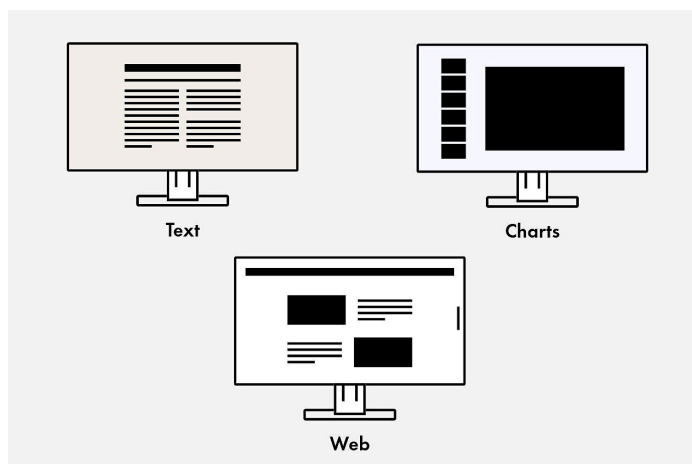

## Variety of ports

### Best connectivity

#### One monitor, many ports

It couldn't be easier: Most end devices, such as PC, laptop, mouse, keyboard or headphones, can be connected directly to the monitor, thanks to its wide range of signal interfaces and ports. This makes your daily work easier and ensures a tidy desk.



## Sustainability

### Environmentally and socially conscious production

#### Comprehensive product sustainability

FlexScan monitors from EIZO are produced in accordance with international environmental regulations and in a socially responsible manner. Suppliers along the supply chain are carefully selected and have also committed themselves to this responsibility. During the design process, attention was paid to the low use of resources with high-quality components and materials as well as careful production. In addition, FlexScan monitors protect resources and the climate thanks to their long service life, warranty and reparability.

[Read detailed information about product sustainability here.](#)



## Warranty

### Highest investment security

#### Five-year warranty

EIZO grants a five-year warranty. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative technology, made from high-end materials.



## Technical Data

GENERAL	
Item no.	S1934H-BK S1934H-GY
Case color	Black Light gray
Areas of application	Office
Product line	FlexScan
Areas of application	Large and medium-sized companies, Private user & small business, Finance
Specific system requirements	None, compatible with most computers and operating systems including macOS and Windows
EAN	4995047049234 4995047049227
SCREEN	
Screen size [in inches]	19
Screen size [in cm]	48
Format	5:4
Viewable image size (width x height) [in mm]	375 x 300
Ideal and recommended resolution	1280 x 1024
Pixel pitch [in mm]	0,29 x 0,29
Supported resolutions	1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480
Panel technology	IPS
Max. viewing angle horizontal [in °]	178
Max. viewing angle vertical [in °]	178
Number of colors or greyscale	16.7 million colors (D-Sub, 8 Bit), 16.7 million colors (DVI, 8 Bit), 16.7 million colors (DisplayPort, 8 Bit)
Color palette/look-up table	1.06 billion color tones / 10 Bit
Max. color space (typical)	sRGB
Max. brightness (typical) [in cd/m²]	250
Max. dark room contrast (typical)	1000:1
Response time grey-grey alternation (typical) [in ms]	14
Backlight	LED
FEATURES & OPERATION	
Preset color/greyscale modes	2x manual memory locations, sRGB, Paper, DICOM
Auto EcoView	✓
EcoView Index	✓
HDCP Decoder	✓
Automatic signal input recognition	✓
Built-in speakers	✓
On-screen menu languages	de, en, fr, es, it, se
Adjustment options	Color Mode, Brightness, Contrast, Color temperature /White point, Gamma, Colour tone, Color saturation, Resolution, Scaling, OSD language, Signal input, All EcoView functions, Volume
Integrated power unit	✓
CONNECTIONS	
Signal inputs	DisplayPort (HDCP 1.3), DVI-D (HDCP 1.4), D-Sub
Graphic signal	DVI Single Link (TMDS), RGB Analog, DisplayPort
Sync formats	Separate
Audio input	3.5 mm stereo jack, DisplayPort
Audio / headphone output	3.5 mm stereo jack
ELECTRICAL DATA	
Frequency	DVI-D: 31-64 kHz/59-61 Hz; D-Sub: 31-64 kHz/55-61 Hz
Power consumption (typical) [in watts]	9
Maximum Power Consumption [in watts]	21 (at maximum brightness with all signal inputs and USB ports in use)
Max. Power consumption in stand-by mode [in watts]	0.5
Power consumption with power switch off [in watts]	0
Energy efficiency class	C
Energy consumption/1000h [in kWh]	9
Power supply	AC 100-120 V / 200-240 V, 50/60 Hz
DIMENSIONS & WEIGHT	
Dimensions (incl. stand) (width x height x depth) [in mm]	405 x 407-507 x 205
Weight (incl. stand) [in kg]	5.6
Dimensions (without stand) (width x height x depth) [in mm]	405 x 334 x 62
Weight (without stand) [in kg]	3.8
Dimension drawing (PDF)	<a href="#">Dimension drawing (PDF)</a>
Rotatability of the stand [in °]	35
Tiltability forwards/backwards [in °]	0 / 30
Pivot between portrait / landscape	clockwise
Height adjustment range [in mm]	100
Hole spacing	100 x 100
CERTIFICATION & STANDARDS	
Certification	CE, CB, TÜV/GS, TÜV/Ergonomics (including ISO 9241-307), EPEAT 2018 (US), RCM, cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA ENERGY STAR, RoHS, WEEE, China RoHS, CCC, EAC
SOFTWARE & ACCESSORIES	
Other box contents	Signal cable DVI-D - DVI-D, Power cord, Manual via download, Quick guide
WARRANTY	
Warranty periode	5 years for unit and LCD module up to 30,000 operating hours, whichever comes first.



# FlexScan **S1934**

Find your EIZO contact:  
EIZO Europe GmbH  
Belgrader Straße 2  
41069 Mönchengladbach  
Phone: +49 2161 8210-0  
[www.eizo.eu](http://www.eizo.eu)

All product names are trademarks or registered trademarks of EIZO Corporation in Japan and other countries or their respective companies. Copyright © 2025 EIZO Europe GmbH, Belgrader Str. 2, 41069 Mönchengladbach, Germany. All rights, errors and modifications reserved. Latest update: 20.04.2025